




## UX10-EX FULLY RUGGED TABLET

- ATEX & IECEx explosive atmosphere certified
- 10th Generation Intel® Core™ i7 / i5 Processor
- 10.1" FHD LumiBond® display with Getac sunlight readable technology (1,000 nits) and capacitive touchscreen
- Multi-functional hard handle for on-the-job flexibility
- Multiple configurable options to fit diverse usage scenarios

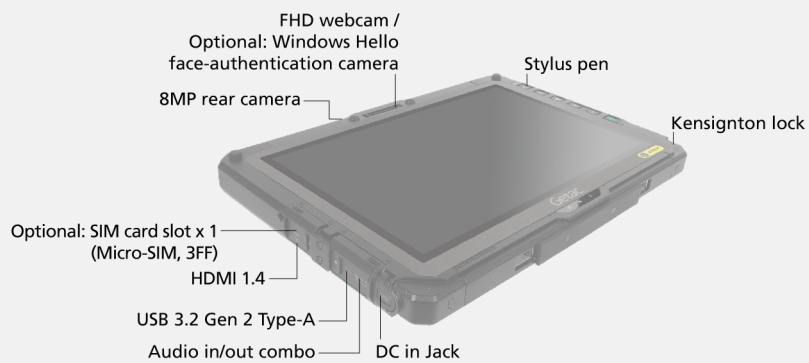

# UX10-EX FULLY RUGGED TABLET

## SPECIFICATIONS

<b>Operating System</b>	Windows 10 Pro Windows 11 Pro
<b>Mobile Computing Platform</b>	Intel® Core™ i5-10210U Processor 1.6GHz Max. 4.2GHz with Intel® Turbo Boost Technology - 6MB Intel® Smart Cache  <b>Platform options:</b> Intel® Core™ i5-10310U, vPro™ Processor 1.7GHz Max. 4.4GHz with Intel® Turbo Boost Technology - 6MB Intel® Smart Cache  Intel® Core™ i7-10510U Processor 1.8GHz Max. 4.9GHz with Intel® Turbo Boost Technology - 8MB Intel® Smart Cache  Intel® Core™ i7-10610U vPro™ Processor 1.8GHz Max. 4.9GHz with Intel® Turbo Boost Technology - 8MB Intel® Smart Cache
<b>VGA Controller</b>	Intel® UHD Graphics
<b>Display</b>	10.1" IPS TFT LCD WUXGA (1920 x 1200) Anti-static protection film 1,000 nits LumiBond® display with Getac sunlight readable technology Capacitive multi-touch screen
<b>Storage &amp; Memory</b>	8GB DDR4 Optional 16GB/32GB DDR4 256GB PCIe NVMe SSD Optional: 512GB / 1TB PCIe NVMe SSD
<b>Keyboard</b>	Power button 5 tablet programmable buttons
<b>Pointing Device</b>	Touchscreen - Capacitive multi-touch screen - Optional dual mode touchscreen (multi-touch and digitizer)
<b>Expansion Slots</b>	Optional (top side): 1D/2D imager barcode reader, or Serial port, or USB 3.2 Gen 1 Type-A port, or USB 3.2 Gen 1 Type-C port, or LAN port (RJ45), or VGA port <sup>i</sup> , or HF RFID reader <sup>ii</sup>

# UX10-EX FULLY RUGGED TABLET

<b>I/O Interface</b>	FHD webcam x 1 <sup>iii</sup> 8M pixels auto focus rear camera x 1 Audio in/out combo x 1 DC in Jack x 1 USB 3.2 Gen 2 Type-A x 1 HDMI 1.4 x 1 Optional: SIM card slot x 1 (Micro-SIM, 3FF) Optional: Windows Hello face-authentication camera (front-facing) x 1 <sup>iii</sup>
<b>Communication Interface</b>	Intel® Wi-Fi 6 AX200, 802.11ax Bluetooth (v5.2) <sup>iv</sup> Optional: Dedicated GPS <sup>v</sup> Optional: 4G LTE mobile broadband with integrated GPS <sup>v,vi</sup> Optional: 10/100/1000 base-T Ethernet
<b>Security Features</b>	TPM 2.0 Kensington lock Optional: Intel® vPro™ Technology Optional: HF RFID reader <sup>ii</sup>
<b>Power</b>	AC adapter (65W, 100-240VAC, 50/60Hz) Li-ion battery (11.1V, typical 4200mAh; min. 4080mAh) x 1 Optional: High capacity Li-ion battery (10.8V, 9240mAh) x 1
<b>Dimension (W x D x H) &amp; Weigh</b>	276.8 x 194.5 x 23.5 mm (10.89" x 7.65" x 0.92") 1.24kg (2.73lbs) <sup>vii</sup>
<b>Rugged Feature</b>	MIL-STD-810H certified IP65 certified Vibration & 6ft (1.8m) drop resistant <sup>viii</sup> ATEX & IECEx certified
<b>Environmental Specification</b>	Temperature <sup>ix</sup> : - Operating: -21°C to 63°C / -6°F to 145°F - Storage: -51°C to 71°C / -60°F to 160°F Humidity: - 95% RH , non-condensing
<b>Explosion Protection</b>	ATEX/IECEx Zone 2/22 Ex II 3G Ex ic op is IIC T4 Gc Ex II 3D Ex ic op is IIIB T130°C Dc

# UX10-EX FULLY RUGGED TABLET

## Pre-installed software

Getac Utility  
Getac Camera  
Getac Geolocation  
Getac Barcode Manager <sup>x</sup>  
Optional: Absolute Persistence<sup>®</sup>

---

## Optional software

Getac Driving Safety Utility  
Getac KeyWedge Barcode Reader Utility  
Getac Device Monitoring System (GDMS)  
Getac VGPS Utility <sup>xi</sup>

---

## Accessories

Battery (11.1V, typical 4200mAh; min. 4080mAh)  
AC adapter (65W, 100-240VAC)  
Capacitive stylus with tether

### Optional:

Battery (11.1V, typical 4200mAh; min. 4080mAh)  
High capacity Li-ion battery (10.8V, 9240 mAh)  
Multi-Bay charger (Dual-Bay)  
Multi-Bay charger (Eight-Bay)  
AC adapter (65W, 100-240VAC)  
Digitizer pen  
Capacitive stylus with tether  
Anti-static protection film  
Hand strap  
Shoulder strap (2-point)  
Shoulder harness (4-point; handsfree)  
100W Type-C adapter

---

## Bumper-to-Bumper warranty

Accidents can take your equipment out of service when you least expect it, especially in a rugged environment, which can cause costly equipment downtime.

That is why Getac has introduced accidental damage as standard under our Bumper-to-Bumper warranty, to help minimize your enterprise IT costs.

Bumper-to-Bumper is your hassle-free guarantee. That means you can depend on us to have your unit back in service within days.

### Standard

3 years Bumper-to-Bumper

---

- I. 1D/2D imager barcode reader, Serial port, USB 3.2 Gen 1 Type-A port, USB 3.2 Gen 1 Type-C port, LAN port (RJ45) and VGA port are mutually exclusive options.
- II. 13.56MHz contactless HF RFID reader (ISO 15693, 14443 A/B, Mifare and FeliCa™ compliant).
- III. FHD webcam and optional Windows Hello face-authentication camera (front-facing) are mutually exclusive options.
- IV. Bluetooth performance and connectable distance may be subject to interference with the environments and performance on client devices, users may be able to reduce effects of interference by minimizing the number of active Bluetooth wireless devices that is operating in the area.
- V. Supports GPS and Glonass.
- VI. Units with 4G LTE option come with an embedded SIM card slot.
- VII. Weight and dimensions vary from configurations and optional accessories.
- VIII. Drop test results vary from configurations and optional accessories.
- IX. Tested by an independent third-party test lab following MIL-STD-810H.

# UX10-EX FULLY RUGGED TABLET

- X. Available when barcode reader option is selected.
- XI. Models require either embedded or standalone GPS module.

Information provided herewith is for reference only, available specification shall be subjected to quotation by request.

## GETAC TECHNOLOGY CORPORATION

5F, Building A, No. 209, Section 1, Nangang Rd.,  
Nangang Dist., Taipei City, 115018, Taiwan, R.O.C.  
Tel : +886 2 2785 7888  
globalmarketing@getac.com | www.getac.com

Copyright © 2022 Getac Technology Corporation and/or any of its affiliates. All Rights Reserved.

Information provided herewith is for reference only, available specification shall be subjected to quotation by request.