




## UX10 FULLY RUGGED TABLET

- 10th Generation Intel® Core™ i7 / i5 Processor
- 10.1" FHD LumiBond® display with Getac sunlight readable technology (1,000 nits) and capacitive touchscreen
- Enhanced enterprise security with optional Intel vPro, Windows Hello face-authentication camera and multi-factor authentication options
- Detachable keyboard & multi-functional hard handle for on-the-job flexibility
- Multiple configurable options to fit diverse usage scenarios



UX10 3D demo

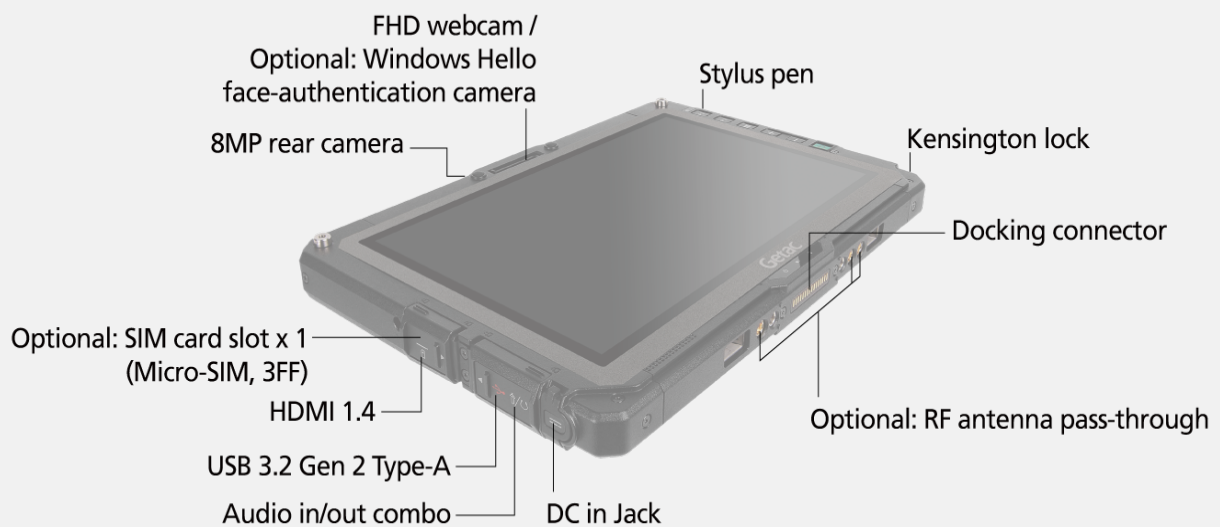

# SPECIFICATIONS

## Operating System

Windows 10 Pro<sup>xvii</sup>  
Windows 11 Pro

## Mobile Computing Platform

Intel® Core™ i5-10210U Processor 1.6GHz  
Max. 4.2GHz with Intel® Turbo Boost Technology  
- 6MB Intel® Smart Cache

## Platform options:

Intel® Core™ i5-10310U, vPro Processor 1.7GHz  
Max. 4.4GHz with Intel® Turbo Boost Technology  
- 6MB Intel® Smart Cache

Intel® Core™ i7-10510U Processor 1.8GHz  
Max. 4.9GHz with Intel® Turbo Boost Technology  
- 8MB Intel® Smart Cache

Intel® Core™ i7-10610U vPro Processor 1.8GHz  
Max. 4.9GHz with Intel® Turbo Boost Technology  
- 8MB Intel® Smart Cache

## VGA Controller

Intel® UHD Graphics

## Display

10.1" IPS TFT LCD WUXGA (1920 x 1200)  
Protection film  
1,000 nits LumiBond® display with Getac sunlight readable technology  
Capacitive multi-touch screen

## Storage & Memory

8GB DDR4  
Optional 16GB/32GB DDR4  
256GB PCIe NVMe SSD  
Optional: 512GB / 1TB PCIe NVMe SSD

## Keyboard

Power button  
5 tablet programmable buttons

## Pointing Device

Touchscreen  
- Capacitive multi-touch screen  
- Optional dual mode touchscreen (multi-touch and digitizer)

## Expansion Slots

Optional (top side): 1D/2D imager barcode reader, or Serial port, or USB 3.2 Gen 1 Type-A port, or USB 3.2 Gen 1 Type-C port, or LAN port (RJ45), or VGA port i, or HF RFID reader<sup>ii</sup>  
Optional (right side): Fingerprint reader, or Serial port + LAN port (RJ-45) iii, or HF RFID reader<sup>ii</sup>  
Optional (back side): Smart card reader, or Bridge battery, or Bridge battery + Smart card reader<sup>iv</sup>

## I/O Interface

FHD webcam x 1<sup>v</sup>  
8M pixels auto focus rear camera x 1  
Audio in/out combo x 1  
DC in Jack x 1  
USB 3.2 Gen 2 Type-A x 1  
HDMI 1.4 x 1  
Docking connector x 1  
Optional: SIM card slot x 1 (Micro-SIM, 3FF)  
Optional: Windows Hello face-authentication camera (front-facing) x 1<sup>vi</sup>  
Optional: RF antenna pass-through for GPS, WWAN and WLAN

## Communication Interface

Intel® Wi-Fi 6 AX200, 802.11ax  
Bluetooth (v5.1)<sup>vi</sup>  
Optional: Dedicated GPS<sup>vii</sup>  
Optional: 4G LTE mobile broadband with integrated GPS<sup>viii</sup>  
Optional: 10/100/1000 base-T Ethernet

## Security Features

TPM 2.0  
Kensington lock  
Optional: Intel® vPro™ Technology  
Optional: HF RFID reader<sup>ii</sup>  
Optional: Fingerprint reader<sup>iii</sup>  
Optional: Smart card reader<sup>iv</sup>

## Power

AC adapter (65W, 100-240VAC, 50/60 Hz)  
Li-ion battery (11.1V, typical 4200mAh; min. 4080mAh) x 1  
Optional: High capacity Li-ion battery (10.8V, 9240mAh) x 1  
Optional: Bridge battery<sup>iv</sup>

## Dimension (W x D x H) & Weight

276.8 x 194.5 x 23.5 mm (10.89" x 7.65" x 0.92")  
1.22kg (2.68lbs)<sup>ix</sup>

## Rugged Feature

MIL-STD-810H certified  
IP65 certified  
MIL-STD-461G certified<sup>x</sup>  
Vibration & 6ft (1.8m) drop resistant<sup>xi</sup>  
Optional: ANSI/UL 121201, CSA C22.2 NO. 213 (Class I, Division 2, Groups A, B, C, D)<sup>xvi</sup>  
Optional: Salt fog certified

## Environmental Specification

Temperature<sup>xii</sup>:  
- Operating: -29°C to 63°C / -20°F to 145°F  
- Storage: -51°C to 71°C / -60°F to 160°F  
Humidity:  
- 95% RH, non-condensing

## Pre-installed software

Getac Utility  
Getac Camera  
Getac Geolocation  
Getac Barcode Manager<sup>xiii</sup>  
Getac Driving Safety Utility (trial version)  
Getac KeyWedge Barcode Reader Utility (trial version)  
Optional: Absolute Persistence<sup>o</sup>

## Optional software

Getac Driving Safety Utility  
Getac KeyWedge Barcode Reader Utility  
Getac Device Monitoring System (GDM5)  
Getac VGPS Utility<sup>xiv</sup>

## Accessories

Battery (11.1V, typical 4200mAh; min. 4080mAh)  
AC adapter (65W, 100-240VAC)  
Capacitive stylus with tether

## Optional:

Carry bag  
Folio case  
Battery (11.1V, typical 4200mAh; min. 4080mAh)  
High capacity Li-ion battery (10.8V, 9240 mAh)  
Multi-Bay charger (Dual-Bay)  
Multi-Bay charger (Eight-Bay)  
AC adapter (65W, 100-240VAC)  
Office dock AC adapter (90W, 100-240VAC)  
MIL-STD-461 AC adapter (90W, 100-240VAC)  
DC-DC vehicle adapter (120W, 11-32VDC)  
Digitizer pen  
Capacitive stylus with tether  
Protection film  
Hand strap  
Shoulder strap (2-point)  
Shoulder harness (4-point; handsfree)  
Detachable keyboard  
Vehicle cradle<sup>xv</sup>  
Keyboard dock  
Vehicle dock<sup>xv</sup>  
Office dock  
100W Type-C adapter  
Getac rugged keyboard

# UX10 FULLY RUGGED TABLET

## Bumper-to-Bumper warranty

Accidents can take your equipment out of service when you least expect it, especially in a rugged environment, which can cause costly equipment downtime. That is why Getac has introduced accidental damage as standard under our Bumper-to-Bumper warranty, to help minimize your enterprise IT costs. Bumper-to-Bumper is your hassle-free guarantee. That means you can depend on us to have your unit back in service within days.

## Standard

3 years Bumper-to-Bumper

- I. 1D/2D imager barcode reader, Serial port, USB 3.2 Gen 1 Type-A port, USB 3.2 Gen 1 Type-C port, LAN port (RJ45) and VGA port are mutually exclusive options.
- II. 13.56MHz contactless HF RFID reader (ISO 15693, 14443 A/B, Mifare and FeliCa™ compliant).
- III. Fingerprint scanner, HF RFID reader and Serial port + LAN port (RJ45) are mutually exclusive options.
- IV. Smart card reader, Bridge battery and Bridge battery + Smart card reader are mutually exclusive options.
- V. FHD webcam and optional Windows Hello face-authentication camera (front-facing) are mutually exclusive options.
- VI. Bluetooth performance and connectable distance may be subject to interference with the environments and performance on client devices, users may be able to reduce effects of interference by minimizing the number of active Bluetooth wireless devices that is operating in the area.
- VII. Supports GPS and Glonass.
- VIII. Units with 4G LTE option come with an embedded SIM card slot.
- IX. Weight and dimensions vary from configurations and optional accessories.
- X. MIL-STD-461 90W AC adapter sold separately.
- XI. Drop test results vary from configurations and optional accessories.
- XII. Tested by an independent third-party test lab following MIL-STD-810H.
- XIII. Available when barcode reader option is selected.
- XIV. Models require either embedded or standalone GPS module.
- XV. Gamber Johnson and Havis vehicle docks are e-mark certified.
- XVI. Available with limited configurations and environment conditions.
- XVII. From 14th October 2025, Windows 10 Pro is going to End of Service. Windows 10 Pro will not be upgradable to Windows 11 Pro and will no longer be eligible to receive Microsoft security updates.

Information provided herewith is for reference only, available specification shall be subjected to quotation by request.



RUGGED | RELIABLE

## THIRD WAVE RUGGEDTECH PVT. LTD.

B-4, Chaitanya, Opp. Maradia Plaza, C.G. Road, Ahmedabad, 380006, Gujarat, India

Tel: +91 93282833304

Web: www.thirdwaverugged.com

Email: info@thirdwaveruggedtech.com

AHEMDABAD | DELHI | BANGALORE | PUNE | HYDERABAD | CHENNAI

	Vehicle Dock	Office Dock
Serial Port	1	1
External VGA	-	1
Microphone	-	1
Audio Output	-	1
DC in Jack	1	1
USB	USB 2.0 x 2 USB 3.2 Gen 1 x 2	USB 2.0 x 2 USB 3.2 Gen 1 x 2
LAN	1	1
HDMI 1.4	-	1
RF Antenna Connector	3 (WWAN, WLAN, GPS)	-
Kensington Lock	1	1

# Getac



GETAC TECHNOLOGY CORPORATION

5F, Building A, No. 209, Section 1, Nangang Rd., Nangang Dist., Taipei City, 115018, Taiwan, R.O.C. Tel : +886 2 2785 7888 globalmarketing@getac.com | www.getac.com Copyright © 2022 Getac Technology Corporation and/or any of its affiliates. All Rights Reserved. Information provided herewith is for reference only, available specification shall be subjected to quotation by request.