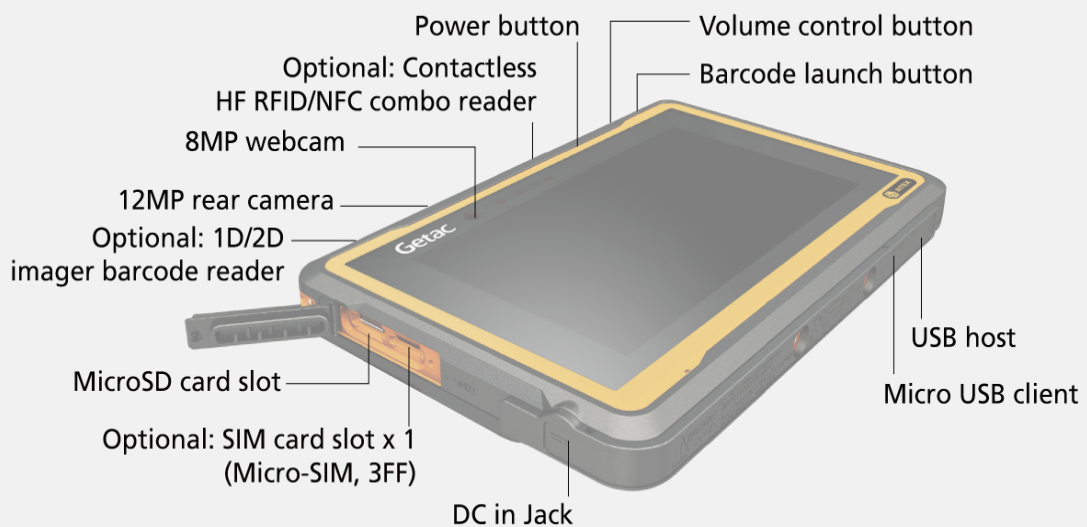# Getac

ZX70-EX FULLY RUGGED TABLET

- Qualcomm® Snapdragon™ 660, Octa-core Processor
- Verified as Android enterprise recommended [i]
- 7" LumiBond® display with Getac sunlight readable technology and glove-enabled capacitive touchscreen
- 6ft drop, MIL-STD-810H and IP67 certified
- Optional barcode reader, RFID reader
- ATEX & IECEx explosive atmosphere certified

CERTIFIED MIL-STD 810H | INGRESS PROTECTION IP67 | 6' DROP | ATEX Ex | IEC® | IECEx™

android enterprise recommended

Power button

Volume control button

Optional: Contactless HF RFID/NFC combo reader

Barcode launch button

8MP webcam

12MP rear camera

Optional: 1D/2D imager barcode reader

USB host

Micro USB client

MicroSD card slot

Optional: SIM card slot x 1 (Micro-SIM, 3FF)

DC in Jack

SPECIFICATIONS

Operating System
Android™ 10.0

Mobile Computing Platform
Qualcomm® Snapdragon™ 660, Octa-core
1.95GHz
Max. 2.2GHz

VGA Controller
Qualcomm® Adreno™ 512 GPU

Display
7" IPS TFT LCD HD (1280 x 720)
Anti-static protection film
LumiBond® display with Getac sunlight
readable technology
Capacitive multi-touch screen

Storage & Memory
4GB LPDDR4
64GB eMMC

Keyboard
Power button
3 tablet programmable buttons

Pointing Device
Touchscreen
- Capacitive multi-touch screen

Expansion Slot
Optional: 1D/2D imager barcode reader

I/O Interface
8M pixels webcam x 1
12M pixels auto focus rear camera x 1
DC in Jack x 1
USB 2.0 (Host) x 1
MicroUSB 2.0 (Client) x 1
MicroSD x 1
Optional: SIM card slot x 1 (Micro-SIM, 3FF)

Communication Interface
Wi-Fi 802.11ac
Bluetooth (v5.0) [ii]
Dedicated GPS
Optional 4G LTE mobile broadband [iii]

Security Features
Optional: HF RFID/NFC combo reader [iv, v]

Power
AC adapter (25W, 100-240VAC, 50/60Hz)
Li-ion battery (3.8V, typical 8480mAh; min.
8220mAh)

Dimension (W x D x H) & Weight
218 x 142 x 27mm (8.58 " x 5.6" x 1.08")
774g (1.71lbs) [vi]

Rugged Features
MIL-STD-810H certified
IP67 certified
Vibration & 6ft (1.8m) drop resistant [vii]
ATEX & IECEx certified

Environmental Specifications
Temperature [viii]:
- Operating: -21°C to 60°C / -6°F to 140°F
- Storage: -40°C to 71°C / -40°F to 160°F

Humidity :
- 95% RH, non-condensing

Explosion Protection
ATEX/IECEx Zone 2/22
Ex II 3G Ex ic op is IIC T5 Gc
Ex II 3D Ex ic op is IIIB T100°C Dc

Pre-installed Software
Getac File Browser
Getac Camera
Getac Input Method
Getac Driving Safety Utility (trial version)
Getac deployXpress (trial version)
Getac settings and Google applications (Search,
Chrome, Gmail, Maps, YouTube, Play, Drive,
YouTube music, Play movies, Duo and photos)

Optional software
Getac Driving Safety Utility
Getac deployXpress
Getac OEMConfig

Accessories
AC adapter (25W; 12V/2A, 100-240VAC;
50/60Hz)
Capacitive stylus with tether
Pen holder
Wrist strap

Optional:
AC adapter (25W; 12V/2A, 100-240VAC;
50/60Hz)
Capacitive stylus with tether
Hand strap with stylus holder
Wrist strap
Pen holder

Bumper-to-Bumper Warranty
Accidents can take your equipment out of
service when you least expect it, especially in a
rugged environment, which can cause costly
equipment downtime.
That is why Getac has introduced accidental
damage as standard under our Bumper-to-
Bumper warranty, to help minimize your
enterprise IT costs.
Bumper-to-Bumper is your hassle-free
guarantee. That means you can depend on us
to have your unit back in service within days.

Standard
3 years Bumper-to-Bumper

ZX70-EX FULLY RUGGED TABLET

I.   Android enterprise recommended rugged devices
     deliver a consistent set of features verified by
     Google with an elevated device baseline, increased
     security standards and enterprise-focused features
     and behaviors to meet the needs of users. Google
     and Android are trademarks of Google LLC.
II. Bluetooth performance and connectable distance
     may be subject to interference with the
     environments and performance on client devices,
     users may be able to reduce effects of interference
     by minimizing the number of active Bluetooth
     wireless devices that is operating in the area.
III. Units with 4G LTE option comes with an embedded
     SIM card slot.
IV. 13.56MHz HF RFID/NFC reader (ISO 15693, 14443
     A/B, Mifare and FeliCa™ compliant).
V.   HF RFID/NFC combo reader applies to US & EU.
VI. Weight and dimensions vary from configurations
     and optional accessories.
VII. Drop test results vary from configurations and
     optional accessories.
VIII. Tested by an independent third-party test lab
     following MIL-STD-810H.

Information provided herewith is for reference only,
available specification shall be subjected to quotation by
request.